



# 《风光欣》技术资料

\*\*\*\*\*

## S8050(ECB) NPN EPITAXIAL SILICON TRANSISTOR

1W OUTPUT AMPLIFIER OF PORTABLE

RADIOS IN CLASS

B PUSH-PULL OPERATION


\* Complimentary to S8550

\* Collector Current  $I_{cm} = 0.8A$

\* Collector Dissipation:  $P_c = 0.8W (T_c = 25)$

### ABSOLUTE MAXIMUM RATINGS( $T_A = 25$ )

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	$V_{CBO}$	40	V
Collector-Emitter Voltage	$V_{CEO}$	25	V
Emitter -Base Voltage	$V_{EBO}$	6	V
Collector Current	$I_c$	0.8	A
Collector Dissipation	$P_c$	0.8	W
Junction Temperature	$T_J$	150	
Storage Temperature	$T_{STG}$	-65 ~150	

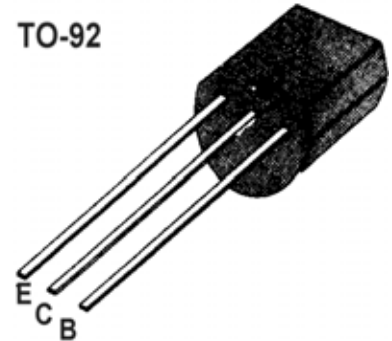

### ELECTRICAL CHARACTERISTICS ( $T_A = 25$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	$BV_{CBO}$	$I_c = 100 \mu A, I_E = 0$	40			V
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	$I_c = 2mA, I_B = 0$	25			V
Emitter-Base Breakdown Voltage	$BV_{EBO}$	$I_E = 100 \mu A, I_c = 0$	6			V
Collector Cut-off Current	$I_{CBO}$	$V_{CB} = 35V, I_E = 0$			100	nA
Emitter Cut-off Current	$I_{EBO}$	$V_{EB} = 6V, I_c = 0$			100	nA
DC Current Gain	$H_{FE1}$	$V_{CE} = 1V, I_c = 5mA$	45	135		
	$H_{FE2}$	$V_{CE} = 1V, I_c = 80mA$	85	160	300	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_c = 500mA, I_B = 50mA$		0.28	0.5	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_c = 500mA, I_B = 50mA$		0.98	1.2	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE} = 1V, I_c = 10mA$		0.66	1.0	V
Output Capacitance	$C_{OB}$	$f = 1MHz, V_{CB} = 10V, I_E = 0$		9		pF
Current Gain-Bandwidth Product	$f_T$	$V_{CE} = 10V, I_c = 50mA$	100	190		MHz

### HFE(2) CLASSIFICATION

Classification	B	C	D	E	F
HFE(2)	85-160	120-200	160-300	300-400	400-500