



# 《风光欣》技术资料

\*\*\*\*\*

## 2SC3265

### NPN EPITAXIAL SILICON TRANSISTOR

#### \*Description

Audio Power Amplifier Application

Power Switching Application

High Current Application

#### \*Features


High  $h_{FE}=100\sim 320$

Low Collector Saturation Voltage

$V_{CE(sat)}=0.4V(\text{Max.})$   $I_C=500mA, I_B=20mA$

Complementary Pair With 2SA1298

SOT-23

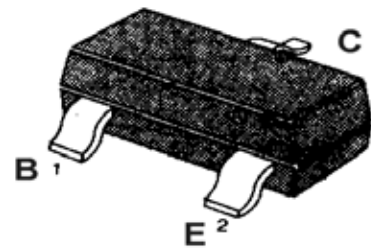

#### ABSOLUTE MAXIMUM RATINGS( $T_A=25$ )

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	$V_{CB0}$	30	V
Collector-Emitter Voltage	$V_{CEO}$	30	V
Emitter -Base Voltage	$V_{EB0}$	5	V
Collector Current	$I_C$	0.8	A
Collector Dissipation	$P_C$	225	mW
Junction Temperature	$T_J$	150	
Storage Temperature	$T_{STG}$	-55 ~150	

#### ELECTRICAL CHARACTERISTICS ( $T_A=25$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	$BV_{CB0}$	$I_C=500\mu A, I_E=0$	30			V
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	$I_C=1mA, I_B=0$	30			V
Emitter-Base Breakdown Voltage	$BV_{EB0}$	$I_E=50\mu A, I_C=0$	5			V
Collector Cut-off Current	$I_{CB0}$	$V_{CB}=35V, I_E=0$			100	nA
Emitter Cut-off Current	$I_{EB0}$	$V_{EB}=6V, I_C=0$			100	nA
DC Current Gain	$h_{FE}$	$V_{CE}=1V, I_C=50mA$	100		320	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=500mA, I_B=20mA$			0.4	V
Transition Frequency	$f_T$	$V_{CE}=5V, I_C=10mA$		120		MHz
Collector Output Capacitance	$C_{ob}$	$f=1MHz, V_{CB}=10V, I_E=0$		13		pF